



Equipment Solutions

For cutting, crimping, and cleaning hose assemblies.



ENGINEERING YOUR SUCCESS.

EQUIPMENT SOLUTIONS

Every step of the way.

With the largest selection of hose, and more fitting sizes and configurations than any other manufacturer, Parker has exactly what you need. Parker also delivers exceptional quality and reliability when it comes to equipment and tooling. Factory-quality hose assemblies can be quickly, easily, and cost effectively manufactured with Parker's industry leading equipment. For example, Parker's Parkrimp system provides users with several key advantages:

- **Perfect alignment:** Our exclusive Parkalign system positions the fitting in the die for a perfect crimp every time.
- **Efficient design:** Bottom loading crimpers make it easier for operators to manage long hose lengths.
- **Color-coded linked dies:** Our linked dies are color-coded by size for easy identification.
- **Durability:** Parkrimp crimpers have been designed and manufactured to provide years of reliable service.

A complete line of equipment and tooling from hose saws, to push-on stands, to crimpers, to cleaning and capping systems are available to help you every step of the way while fabricating hose assemblies.



HOSE ASSEMBLIES begin with cutting the necessary length of hose.

Parker has a multiple hose cut-off machines that offer industry leading performance. They are engineered to cut single and multiple wire reinforced hose easily and efficiently. Our cut-off machines are easy to operate and assure clean, square hose cuts. These machines require very little work space due to their compact design. We offer four different cut-off machines in order to deliver what you need for your fabrication requirements.



Part No. 332T-115V

- Cuts spiral reinforced hose up to 1¼" I.D.
- 8" scalloped cutting blade
- 1.5 HP, 3450 RPM, 115/230V single phase electric motor wired for 115V


LET PARKER HELP YOU

select the appropriate materials and tooling.

CrimpSource is Parker's exclusive online software application that supplies you with the necessary crimp specifications in order to adhere to our strict safety standards. It is the industry's most complete resource for crimper technical information. It provides easy access to all the specifications necessary to correctly fabricate a factory-quality hose assembly.

With a series of dropdown menus, users are able to choose a crimper, the type of hose, and compatible fittings. Once the crimper is selected, the user is provided with crimp specs, crimper die recommendations, technical manuals, and crimper decals available for immediate printing.

For complete product information on all of Parker's crimpers, please visit: www.parker.com/crimpsource

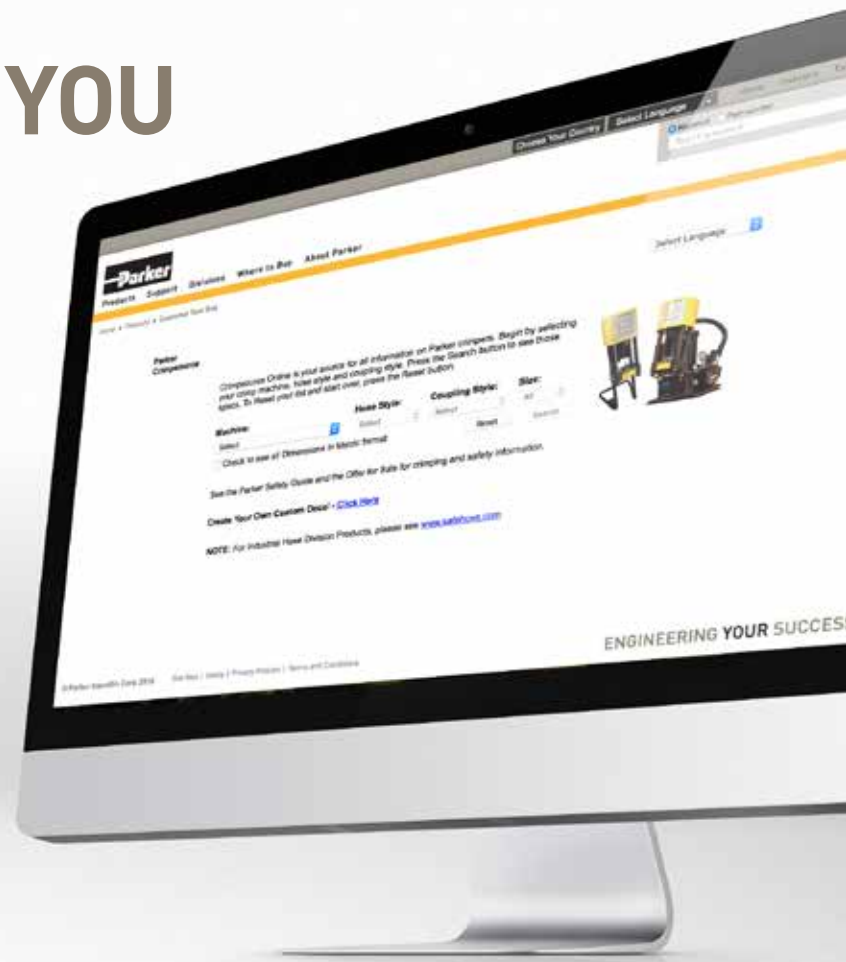

Part No. 631075

- Cuts multi-braided wire reinforced hose including 4-wire spiral up to 1¼" I.D.
- 7" scalloped cutting blade
- 115V, 13 amp, universal AC motor
- Portable saw for cutting on the job with universal clamp attachment



Part No. 239 & 339

- Cuts multi-braided wire reinforced hose including 6-wire spiral up to 2" I.D.
- 10" scalloped cutting blade
- Model 239 – 230V, single phase motor
- Model 339 – 3 HP motor 230V, 3 phase, 60 cycle

ONCE THE HOSE HAS BEEN CUT AND FITTINGS HAVE BEEN SELECTED, it's time to attach them.

In order to make a proper hose assembly, hoses must be pushed completely onto the fitting. If the hose is not inserted into the shell of the fitting per the recommended length, the fitting can blow off, making for extremely dangerous situations. Hose insertion depth blocks are a way to quickly and easily mark proper hose insertion depth for guaranteed validity each and every time and reducing the risk of failure.

In addition to hose insertion depth blocks, Parker offers a fitting push-on stand which quickly and easily pushes fittings onto hose, in order to boost productivity and quality of hose assemblies. This stand eliminates the need for rubber mallets and oils to get fittings onto the end of the hose and can be used for crimped fittings as well as field attachable fittings.



WITH FITTINGS PROPERLY ATTACHED, crimping is simple.



Karrykrimp & Karrykrimp Bench Mount

Parker's Karrykrimp modular design comes in both bench mount and portable styles. This gives users the flexibility of a portable crimper with the advantages of increased productivity when connected to the stationary power unit. The increased height enables longer bent tube fittings to be crimped with Parker's 25, 26, 43, 81 and HY Series Parkrimp fittings. Parker's Karrykrimp models can crimp straight or bent-stem steel fittings from 5/8" to 1-1/4" in diameter.

- Compatible with 2-wire braided hoses up to 1-1/4" I.D. and 4-wire spiral hoses up to 5/8" I.D.
- Pivoting pusher design for easy die change out
- For use with 25, 26, 43, 81, and HY series steel fittings

Part Number			Description	Individual Part Number
82C-CHD	82C-061L	82C-KKB		
■	■	■	Crimp head	82C-CHD
		■	Bench power unit assembly	85C-ZMS
■	■	■	Silver die ring	82C-R01
■	■	■	Black die ring	82C-R02
	■		Hose assembly	85C-00L
	■		Stand assembly	85C-STD
		■	Hose assembly	85C-03L

Optional Tooling: Die Kit 43K-KDA (Includes 43 Series dies in sizes 1/4", 3/8", 1/2", 3/4", 1", 1-1/4" only)



Parkrimp 2

The Parkrimp 2 is Parker's largest and most versatile crimping machine that comes in either single phase or three phase electric. Parker's Parkrimp 2 models can crimp straight or bent-stem steel and stainless steel fittings from 1/4" to 2" in diameter including 25, 26, 43, 70, 71, 73, 76, 77*, 78, 79, 81 S6, and HY series.

- Compatible with 2-wire braided hose up to 2" I.D., and 4- and 6-wire spiral hose up to 2" I.D.
- Crimps both steel and stainless steel fittings
- For use with 25, 26, 43, 70, 71, 73, 76, 77*, 78, 79, 81 S6, and HY series fittings

Part Number		Description	Individual Part Number
83C-081	83C-082		
■	■	Parkrimp 2 crimper head assembly	83C-080
■		Parkrimp 2 stand assembly with 230/460 volt, 3 phase, 50/60 Hz power unit (wired for 230 volt)	83C-S40
	■	Parkrimp 2 stand assembly with 230 volt, 1 phase, 50/60 Hz power unit	83C-S20
■	■	Adapter bowl	83C-OCB
■	■	Spacer ring	83C-R02
■	■	Spacer plate	83C-R02H

*Can crimp 77 series stainless steel fittings up to 1-1/2"

Optional Tooling: Die Kit PK2-KDA (Includes 43 Series dies in sizes 1/4", 3/8", 1/2", 3/4", 1", 1-1/4" and 77 Series dies in sizes 1/2", 5/8", 3/4", 1", 1-1/4", 1-1/2", and 2" only) or Die Kit 77K-KDA (includes 77 Series dies in sizes 1/2", 5/8", 1", 1-1/4", 1-1/2", and 2" only)

Karrykrimp 2 & Karrykrimp 2 Bench Mount

The Karrykrimp 2 is a portable or bench mount, compact and ruggedly built crimping machine that is an economic alternative for the self-assembly of Parker's hose and fittings. Parker's Karrykrimp 2 models can easily crimp Parkrimp style straight or bent-stem stainless and stainless steel fittings up to 1-1/4" in diameter including 25, 26, 43, 70, 71, 73, 77, 78, 81 and HY series.

- Compatible with 2-wire braided hoses up to 1-1/4" I.D., 4-wire spiral hose up to 1-1/4" I.D., and 6-wire spiral hose up to 1" I.D.
- Pivoting pusher design for easy die change out
- For use with 25, 26, 43, 70, 71, 73, 77, 78, 81 and HY series fittings

Part Number			Description	Individual Part Number
85C-CHD	85C-061L	85C-KKB		
■	■	■	Crimp head	85C-CHD
		■	Bench power unit assembly	85C-ZMS
■	■	■	Silver die ring	85C-R01
■	■	■	Black die ring	85C-R02
	■		Hose assembly	85C-00L
	■		Stand assembly	85C-STD
		■	Hose assembly	85C-03L

Optional Tooling: Die Kit KK2-KDA (Includes 43 Series dies in sizes 1/4", 3/8", 1/2", 3/4", 1", 1-1/4" and 77 Series dies in sizes 1/2", 5/8", 3/4", and 1" only)



POWER PORTABLE CRIMPERS the way you want.

Parker offers a wide array of portable crimper power units to meet the demands of any crimping application. For maximum portability, Parker offers two hand-held crimping pumps to increase productivity and versatility for smaller hose assembly needs. Or, to power a standard crimping system at any location,

order the electric pump, air/hydraulic pump or vehicle battery-powered pump depending on the application. Parker's crimper power units deliver up to 10,000 PSI for the Karrykrimp and Karrykrimp 2.

HAND PUMP

Part No. 82C-OHP

Length: 23"
Width: 4"
Height: 5"
Port Size: 3/8" NPTF
Weight: 9 lbs
Hydraulic Fluid: Enerpac oil



HAND PUMP

Part No. 85C-OHP

Length: 29"
Width: 13"
Height: 11"
Port Size: 3/8" NPTF
Weight: 61 lbs
Hydraulic Fluid: Enerpac oil



ELECTRIC PUMP

Part No. 82C-OEP

Length: 13"
Width: 13"
Height: 15"
Port Size: 3/8" NPTF
Weight: 31 lbs
Hydraulic Fluid: Enerpac oil
Power Source: 115 volt, 1 phase, 50/60 Hz, 9 amp



ELECTRIC PUMP

Part No. 85C-OEP

Length: 19"
Width: 11"
Height: 17"
Port Size: 3/8" NPTF
Weight: 50 lbs
Hydraulic Fluid: Enerpac oil
Power Source: 115 volt, 1 phase, 50/60 Hz, 20 amp



AIR/HYDRAULIC PUMP

Part No. 82C-OAP

Length: 15"
Width: 6"
Height: 6"
Intake Port Size: 1/4" NPTF
Output Port Size: 3/8" NPTF
Weight: 31 lbs
Hydraulic Fluid: Enerpac oil



VEHICLE BATTERY-POWERED PUMP

Part No. 85C-12V

Length: 12"
Width: 6"
Height: 19.5"
Weight: 67 lbs
Hydraulic Fluid: ISO-40



REDUCE CONTAMINATION so hose assemblies last longer.

After your hose assembly is complete, the final step is to rid the assembly of any possible contamination. Tiny particles could be stuck inside the hose from the fabrication process, so Parker offers several products to help make sure your hose assemblies are contamination free – reducing costly downtime and hose failures.

Parker offers two hose cleaning kits that will ensure your hose assemblies are contamination free. These kits include a pellet flushing system, which fires a Styrofoam pellet through the hose assembly dragging out any debris that may be stuck in the hose. It takes only seconds to clean, greatly reducing the chance of a hydraulic system failure.

Along with the pellet flushing system, Parker offers an innovative capping system. Clean Seal is a quick, easy, and clean alternative to cap your hose and fitting assemblies. This reduces contamination, capping time, and cap inventory as one cap may fit many different end configurations and sizes. Simply place the cap on the end of your hose or fitting, place in the Clean Seal System for a few seconds, and remove. The caps enable a secure fit due to the heat shrink technology. Caps can just as easily be removed by pulling the tab that sticks up once heated.



Ultra Clean Hose Cleaning Kit



Economy Hose Cleaning Kit



Clean Seal

ORGANIZATION IS KEY to reducing labor costs.

Parker offers stock bins and die racks in order to keep hoses, fittings, and dies organized so you can easily and efficiently find what you are looking for. Storing and selecting the right materials is made easy and simple, which can boost productivity and quality of fabricating hose assemblies.



Parker Fluid Connectors Group

North American Divisions & Distribution Service Centers

Your complete source for quality tube fittings, hose & hose fittings, brass & composite fittings, quick-disconnect couplings, valves, and assembly tools, locally available from a worldwide network of authorized distributors.

Fittings:

Available in inch and metric sizes covering SAE, BSP, DIN, GAZ, JIS, and ISO thread configurations, manufactured from steel, stainless steel, brass, aluminum, nylon, and thermoplastic.

Hose, Tubing, and Bundles:

Available in a wide variety of sizes and materials including rubber, wire-reinforced, thermoplastic, hybrid and custom compounds.

Worldwide Availability:

Parker operates Fluid Connectors manufacturing locations and sales offices throughout North America, South America, Europe, and Asia-Pacific.

For information, call toll-free:

1-800-C-PARKER
(1-800-272-7537)

North American Divisions

Fluid System Connectors Division

Otsego, MI
phone 269 694 9411
fax 269 694 4614

Hose Products Division

Wickliffe, OH
phone 440 943 5700
fax 440 943 3129

Industrial Hose Division

Wickliffe, OH
phone 440 833 2120
fax 440 833 2230

Parflex Division

Ravenna, OH
phone 330 296 2871
fax 330 296 8433

Quick Coupling Division

Minneapolis, MN
phone 763 544 7781
fax 763 544 3418

Tube Fittings Division

Columbus, OH
phone 614 279 7070
fax 614 279 7685

Distribution Service Centers

Buena Park, CA

phone 714 522 8840
fax 714 994 1183

Conyers, GA

phone 770 929 0330
fax 770 929 0230

Louisville, KY

phone 502 937 1322
fax 502 937 4180

Portland, OR

phone 503 283 1020
fax 503 283 2201

Toledo, OH

phone 419 878 7000
fax 419 878 7001
fax 419 878 7420
(FCG Kit Operations)

Canada

Grimsby, ONT

phone 905 945 2274
fax 905 945 3945
(Contact Grimsby for other Service Center locations.)

